


# ENERGY SAVING EVAP VENT COVER Instruction Manual



1×Single hook  
Lanyards



1×Draft Shield



1×Ball Lock


## When should I install/remove the vent covers?

- Fit the covers if you are no longer using your Evaporative Cooler or Refrigerated Air Conditioning system.
- Fit the covers when you use your heating system for the first time each year.
- Remove the covers when you use your cooling system for the first time each year.

## Evap vent cover Installation Guide:

1. For single-hook installations connect the hook as shown in image (A), keeping the hook as close to the center as possible so that it lines up with the hole in the Shield. Use the grill mounting screws (pointer in picture A) in the vent cover to center the hook.

2. Insert the end of the Lanyard through the center hole of the Shield and then insert the Ball Lock on the end of the Lanyard as shown in image B. Slide the Ball Lock up against the Shield making sure that the Shield is adjusted to cover the entire grill.

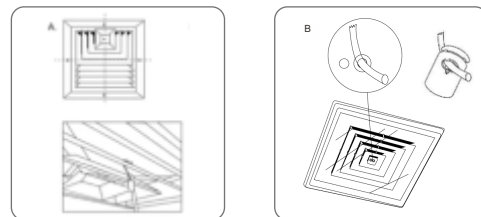

3. Make sure the Ball Lock is snug and slip the end of the lanyard into the remaining hole on the Shield to keep it out of sight.

Note: If the grill being covered is against a wall or ceiling corner, the flange on the edge of the Shield touching the corner must be trimmed to permit the Shield to fit properly.

## Shenzhen ERS Technology

Factory Add: C209, Baohuasen International Center, Qianjin Second Road, Xixiang Town, Bao'an District, Shenzhen, China

Warehouse Add: 57 Tarnard Dr, Braeside VIC 3195

Tel: 048 470 3010

Email: info@erstech.com.au

5 year  
warranty